


DS-2CD2D14WD


1.0 MP WDR Pinhole Network Camera

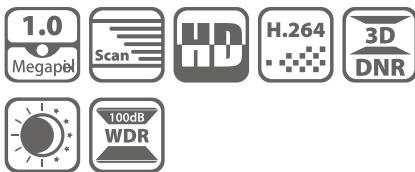

Key Features

- Up to 1 Megapixel (1280 x 720) Resolution
- HD720p Real-Time Video
- 100 dB WDR
- 3D DNR

Dimensions

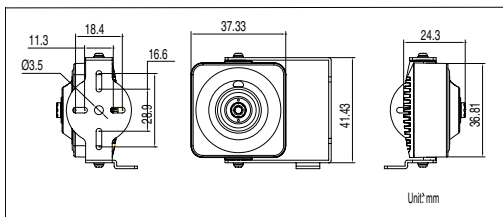

Order Models

DS-2CD2D14WD

| DS-2CD2D14WD | |
|--------------------------|--|
| Camera | |
| Image Sensor | 1/4" progressive scan CMOS |
| Minimum Illumination | 0.028 lux @ f/2.0 |
| Shutter Time | 1/3 sec. to 1/100,000 sec. |
| Lens | 2.8 mm @ f/2.0, 67.3° |
| Day/Night | Electronic |
| Digital Noise Reduction | 3D DNR |
| Wide Dynamic Range | 100 dB |
| Compression Standard | |
| Video Compression | H.264/MJPEG |
| H.264 Codec Profile | Baseline profile/main profile |
| Video Bit Rate | 32 Kbps to 8 Mbps |
| Image | |
| Maximum Image Resolution | 1280 x 720 |
| Frame Rate | 60 Hz: 30 fps (1280 x 720), 30 fps (704 x 576), 30 fps (640 x 480) |
| Image Settings | Saturation, brightness, contrast adjustable through client software or Web browser |
| Network | |
| Network Storage | NAS |
| Alarm Triggers | Intrusion, line crossing, motion detection, dynamic analysis, tampering alarm |
| Protocols | TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour |
| System Compatibility | ONVIF, PSIA, CGI, ISAPI |
| General Functionalities | Flickerless, dual stream, heartbeat, mirror, user authentication, video mask, watermark |
| Interface | |
| Communication Interface | 1 RJ-45 10 M/100 M Ethernet port |
| General | |
| Operating Conditions | -30° C to 60° C (-22° F to 140° F), humidity 95% or less (non-condensing) |
| Power Supply | 12 VDC ±10% |
| Power Consumption | Maximum 3 W |
| Dimensions | 37.3 mm × 41.4 mm × 24.3 mm (1.47" × 1.63" × .96") |
| Weight | 55 g (1.94 ozs) |