

## DS-7200HUHI-K/P SERIES TURBO HD DVR

### Features and Functions



#### Video Input and Transmission

- Self-adaptive normal camera and Hikvision PoC camera connection
- Up to 8-ch 6 MP IP cameras input for DS-7216HUHI-K2/P
- 8 MP/5 MP/4 MP HDTV video input and live view for DS-7208/7216HUHI-K2/P, and 5 MP/4 MP for DS-7204HUHI-K1/P
- Long distance transmission over UTP and coaxial cable: max. 500m for 1080p and 700m for 720p HDTV signal, and 200m for PoC camera
- Automatic power supply management for PoC camera to guarantee safety

#### Compression and Recording

- H.265+/H.265/H.264+/H.264 encoding for the main stream, and H.265/H.264 for the sub-stream of analog cameras
- Connectable to H.265+/H.265/H.264+/H.264 IP cameras
- H.265+ can be enabled to improve encoding efficiency and reduce data storage costs
- Full channel recording at up to 8 MP resolution for DS-7208/7216HUHI-K2/P

#### Video Output

- Simultaneous HDMI/VGA output
- HDMI output at up to 4K (3840 × 2160) resolution for DS-7208/7216HUHI-K2/P
- Separate CVBS output

#### Storage and Playback

- One SATA interface for DS-7204HUHI-K1/P, and two SATA interfaces for DS-7208/7216HUHI-K2/P (up to 8 TB capacity per HDD)
- 4/8/16-ch synchronous playback
- Smart search for efficient playback
- Supports third party cloud storage (Dropbox/Google Drive/Microsoft OneDrive)

#### Smart Function

- Supports multiple VCA (Video Content Analytics) events for both analog and smart IP cameras
- Supports line crossing detection and intrusion detection of all channels, and 2-ch sudden scene change detection
- VCA information overlay in live view and smart playback
- VQD (Video Quality Diagnostics)
- Supports PTZ control via Omnicast VMS of Genetec protocol

#### Network & Ethernet Access


- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- 1 RJ45 10M/100M self-adaptive Ethernet interface for DS-7204HUHI-K1/P, and 1 RJ45 10M/100M/1000M self-adaptive Ethernet interface for DS-7208/7216HUHI-K2/P



## Specifications

Model		DS-7204HUHI-K1/P	DS-7208HUHI-K2/P	DS-7216HUHI-K2/P	
Video/Audio input	Video compression	H.265+/H.265/H.264+/H.264			
	Analog video input	4-ch BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection	8-ch	16-ch	
	HDTVI input	5 MP, 4 MP, 3 MP, 1080p30, 1080p25, 720p60, 720p50, 720p30, 720p25	8 MP, 5 MP, 4 MP, 3 MP, 1080p30, 1080p25, 720p60, 720p50, 720p30, 720p25		
	AHD input	5 MP, 4 MP, 1080p25, 1080p30, 720p25, 720p30			
	HDCVI input	4 MP, 1080p25, 1080p30, 720p25, 720p30			
	CVBS input	PAL/NTSC			
	PoC camera input	Supports Hikvision PoC camera <b>Note:</b> Do not unplug or plug the PoC camera if it is powered by the external power supply.			
	IP video input		2-ch	4-ch	8-ch
			Up to 6 MP resolution Supports H.265+/H.265/H.264+/H.264 IP cameras		
	Audio compression	G.711u			
Audio input	4-ch, RCA (2.0 Vp-p, 1 KΩ)				
Video/Audio output	CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480			
	HDMI/VGA output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	<b>VGA:</b> 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz <b>HDMI:</b> 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz		
	Encoding resolution	5 MP/4 MP/3 MP/1080p/720p/WD1/4CIF/VGA/CIF	8 MP/5 MP/4 MP/3 MP/1080p/720p/WD1/4CIF/VGA/CIF		
	Frame rate	Main stream: 5 MP@12fps/4 MP@15fps/3 MP@18fps 1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N)	Main stream: 8 MP@8fps/5 MP@12fps/4 MP@15fps/3 MP@18fps 1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N)		
		Sub-stream: WD1/4CIF/CIF@25fps (P)/30fps (N)			
	Video bit rate	32 Kbps to 10 Mbps			
	Audio output	1-ch, RCA (Linear, 1 KΩ)			
	Audio bit rate	64 Kbps			
	Dual stream	Support			
	Stream type	Video, Video & Audio			
Network management	Synchronous playback	4-ch	8-ch	16-ch	
	Remote connections	32	64	128	
Hard disk	Network protocols	TCP/IP, PPPoE, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF			
	SATA	1 SATA interface	2 SATA interfaces		
External interface	Capacity	Up to 8 TB capacity for each disk			
	Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 KΩ) (using the first audio input)			
	Network interface	1, RJ45 10M/100M self-adaptive Ethernet interface	1, RJ45 10M/100M/1000M self-adaptive Ethernet interface		
	USB interface	2 × USB 2.0	Front panel: 1 × USB 2.0 Rear panel: 1 × USB 3.0		
	Serial interface	RS-485 (half-duplex)			
General	Alarm in/out	4/1	8/4	4/1	
	Power supply	48 VDC		100 to 240 VAC	
	Consumption (without HDD)	≤ 40 W	≤ 60 W	≤ 140 W	
	Working temperature	-10 °C to +55 °C (+14 °F to +131 °F)			
	Working humidity	10% to 90%			
	Dimensions (W × D × H)	315 × 242 × 45 mm (12.4 × 9.5 × 1.8 inch)	380 × 320 × 48 mm (15.0 × 12.6 × 1.9 inch)		
Weight (without HDD)	≤ 1.5 kg (3.3 lb)	≤ 2 kg (4.4 lb)	≤ 3.8 kg (8.4 lb)		

## Physical Interfaces

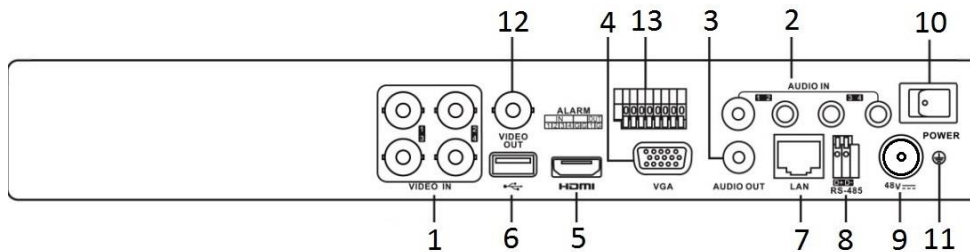

**NOTE**

The rear panel of DS-7208/7216HUHI-K2/P provides 8/16 video input interfaces.

Index	Description	Index	Description
1	VIDEO IN	8	RS-485 Serial Interface
2	AUDIO IN, RCA Connector	9	48 VDC Power Input (for DS-7204/7208HUHI-K/P); 100 to 240 VAC (for DS-7216HUHI-K2/P)
3	AUDIO OUT, RCA Connector	10	Power Switch
4	VGA Interface	11	GND
5	HDMI Interface	12	VIDEO OUT
6	USB Interface	13	Alarm In/Out
7	LAN Network Interface		

## Available Models

DS-7204HUHI-K1/P, DS-7208HUHI-K2/P, DS-7216HUHI-K2/P

Distributed by



## HIKVISION

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com